


# ESS-3G-1K (Energy Storage System)

BAE Systems offers energy storage system options depending on your operating needs. Our new ESS-3G-1K uses highly efficient, power-dense, and reliable, ultracapacitor technology to increase energy storage system life while improving the total cost of ownership. Depending on the duty cycle, users can expect a 12-year life with its ability to withstand millions of charge/discharge cycles.

What's more, with this option, operators can enable Stop/Start technology which allows the bus engine to shut-off at stops, while electric accessories continue to operate. \* BAE Systems' hybrid electric systems power the accessories, such as air conditioning, power steering, and air brake compressor electrically to save both fuel and emissions.

\*Engine-off time and electric accessory performance will vary; talk to a sales representative about anti-idling.

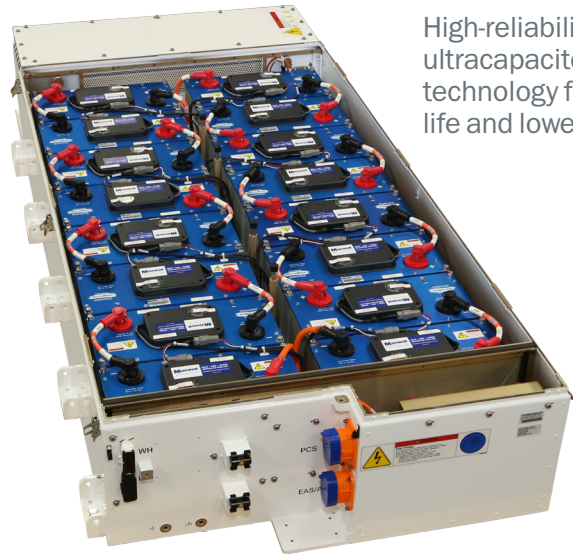

High-reliability  
ultracapacitor  
technology for longer-  
life and lower cost

## Features

- Electric double-layer capacitor (ELDC) technology
- High-efficiency, high-reliability, long-life
- Lower-cost option
- Lightweight
- J1939 SAE messaging
- Allows for system-level compliance to OBD
- Finger-tip proof, high voltage connectors (IPXXB)
- 1 kWh nominal energy
- Environmentally-sealed IP65 ultracapacitor module
- Fully-engineered simple single fan cooling system (no heating required for cold climates)


## Benefits

- Provides highly-efficient and reliable energy storage for hybrid application
- Ultracapacitor technology is rugged, generating long product life
- Maximizes energy recovery from regenerative braking to improve fuel economy
- 12-year design life eliminates the need for mid-life refresh

## Energy Storage System 3G-1K

Accessory Power System (APS)

Propulsion Control System (PCS)

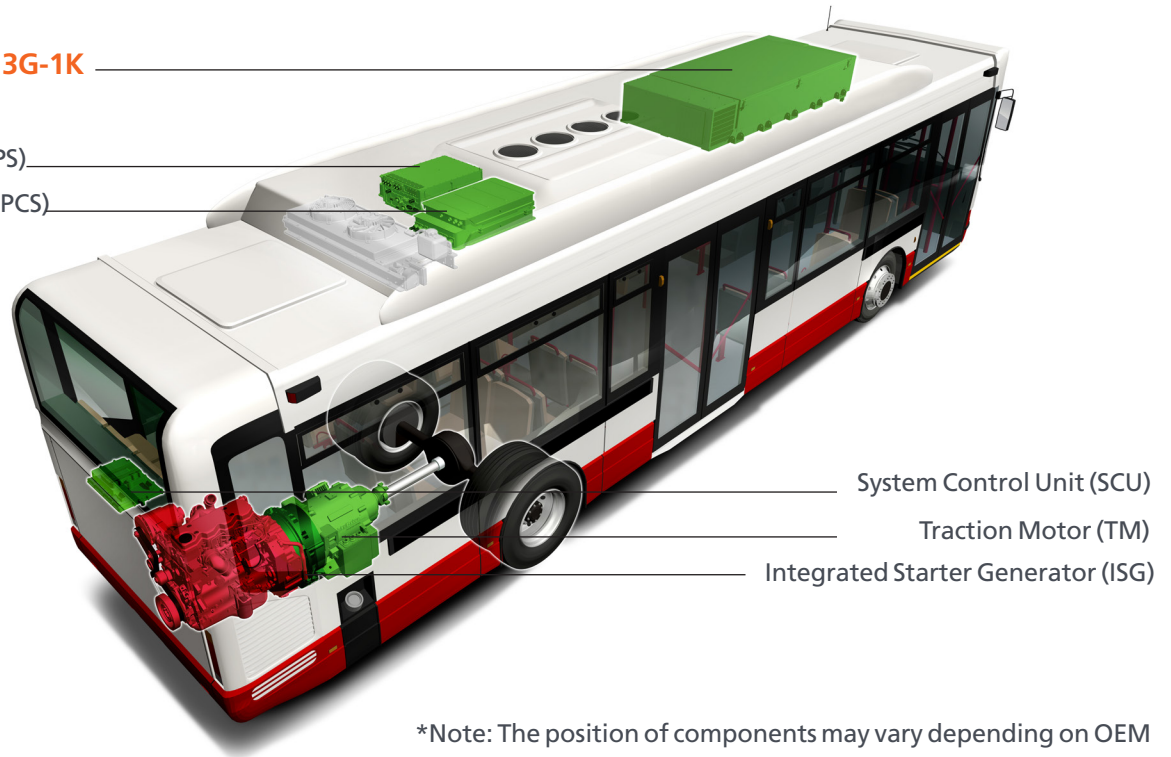

System Control Unit (SCU)

Traction Motor (TM)

Integrated Starter Generator (ISG)

\*Note: The position of components may vary depending on OEM

### ESS-3G-1K Specification

#### Ratings

- Peak design power: +200 kW
- Nominal voltage: 550-750 Vdc
- Total capacity: 866 Wh
- Chemistry: EDLC
- Operating temperature: -40°F to 125°F (-40°C to 52°C)
- Design life: 12 years (nominal)

#### Size

- Height: 13.5 in (.343 m)
- Width: 40.1 in (1.020 m)
- Length: 85.3 in (2.167 m)
- Weight: 744 lbs. (351 kg)
- Cabinet material: aluminum

#### Cooling

- Filtered, forced, ambient air, IP65 module

The new ESS-3G-1K is available for HDS100, HDS200, HDS300 family of products.

BAE Systems  
1098 Clark Street  
Endicott, NY 13760

BAE Systems  
Marconi Way  
Rochester, Kent ME1 2XX  
[www.hybridrive.com](http://www.hybridrive.com)

This document gives only a general description of products and services and except where expressly provided otherwise shall not form part of any contract. From time to time, changes may be made in the products or conditions of supply.

Published work © 2017 BAE SYSTEMS. All rights reserved.

BAE SYSTEMS is a registered trade mark of BAE Systems plc.